

Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <http://www.nxp.com>, <http://www.philips.com/> or <http://www.semiconductors.philips.com/>, use **<http://www.nexperia.com>**

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use **salesaddresses@nexperia.com** (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:


- © **Nexperia B.V. (year). All rights reserved.**

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

DATA SHEET

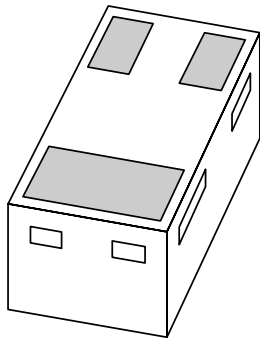

PBSS3540M

40 V, 0.5 A

PNP low V_{CEsat} (BISS) transistor

40 V, 0.5 A
PNP low V_{CEsat} (BISS) transistor

PBSS3540M

FEATURES

- Low collector-emitter saturation voltage V_{CEsat}
- High collector current capability I_C and I_{CM}
- High efficiency leading to reduced heat generation
- Reduced printed-circuit board requirements.

APPLICATIONS

- Power management:
 - DC-DC converter
 - Supply line switching
 - Battery charger
 - LCD backlighting.
- Peripheral driver:
 - Driver in low supply voltage applications (e.g. lamps and LEDs).
 - Inductive load drivers (e.g. relays, buzzers and motors).

DESCRIPTION

Low V_{CEsat} PNP transistor in a SOT883 leadless ultra small plastic package.
NPN complement: PBSS2540M.

MARKING


TYPE NUMBER	MARKING CODE
PBSS3540M	DA

QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	UNIT
V_{CEO}	collector-emitter voltage	−40	V
I_C	collector current (DC)	−500	mA
I_{CM}	peak collector current	−1	A
R_{CEsat}	equivalent on-resistance	<700	mΩ

PINNING

PIN	DESCRIPTION
1	base
2	emitter
3	collector

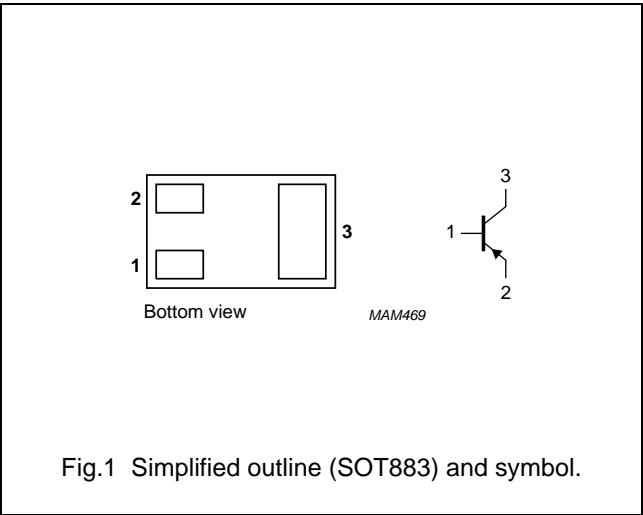

40 V, 0.5 A PNP low V_{CEsat} (BISS) transistor

PBSS3540M

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	–40	V
V_{CEO}	collector-emitter voltage	open base	–	–40	V
V_{EBO}	emitter-base voltage	open collector	–	–6	V
I_C	collector current (DC)	notes 1 and 2	–	–500	mA
I_{CM}	peak collector current		–	–1	A
I_{BM}	peak base current		–	–100	mA
P_{tot}	total power dissipation	$T_{amb} \leq 25\text{ °C}$; notes 1 and 2	–	250	mW
		$T_{amb} \leq 25\text{ °C}$; note 1 and 3	–	430	mW
T_{stg}	storage temperature		–65	+150	°C
T_j	junction temperature		–	150	°C
T_{amb}	operating ambient temperature		–65	+150	°C

Notes

1. Refer to SOT883 standard mounting conditions.
2. Device mounted on an FR4 printed-circuit board, single-sided copper, tinplated, standard footprint, with 60 μm copper strip line.
3. Device mounted on a printed-circuit board, single-sided copper, tinplated, mounting pad for collector 1 cm^2 .

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-a}$	thermal resistance from junction to ambient	in free air; notes 1 and 2	500	K/W
		in free air; notes 1, 3 and 4	290	K/W

Notes

1. Refer to SOT883 standard mounting conditions.
2. Device mounted on an FR4 printed-circuit board, single-sided copper, tinplated, standard footprint, with 60 μm copper strip line.
3. Device mounted on a printed-circuit board, single-sided copper, tinplated, mounting pad for collector 1 cm^2 .
4. Operated under pulsed conditions: duty cycle $\delta \leq 20\%$, pulse width $t_p \leq 30\text{ ms}$.

Soldering

Reflow soldering is the only recommended soldering method.

40 V, 0.5 A
PNP low V_{CEsat} (BISS) transistor

PBSS3540M

CHARACTERISTICS $T_{amb} = 25\text{ °C}$ unless otherwise specified.


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector-base cut-off current	$V_{CB} = -30\text{ V}; I_E = 0$	–	–	–100	nA
		$V_{CB} = -30\text{ V}; I_E = 0; T_J = 150\text{ °C}$	–	–	–50	μA
I_{EBO}	emitter-base cut-off current	$V_{EB} = -5\text{ V}; I_C = 0$	–	–	–100	nA
h_{FE}	DC current gain	$V_{CE} = -2\text{ V}; I_C = -10\text{ mA}$	200	–	–	
		$V_{CE} = -2\text{ V}; I_C = -100\text{ mA}$; note 1	150	–	–	
		$V_{CE} = -2\text{ V}; I_C = -500\text{ mA}$; note 1	40	–	–	
V_{CEsat}	collector-emitter saturation voltage	$I_C = -10\text{ mA}; I_B = -0.5\text{ mA}$	–	–	–50	mV
		$I_C = -100\text{ mA}; I_B = -5\text{ mA}$	–	–	–130	mV
		$I_C = -200\text{ mA}; I_B = -10\text{ mA}$	–	–	–200	mV
		$I_C = -500\text{ mA}; I_B = -50\text{ mA}$; note 1	–	–	–350	mV
R_{CEsat}	equivalent on-resistance	$I_C = -500\text{ mA}; I_B = -50\text{ mA}$; note 1	–	440	<700	$\text{m}\Omega$
V_{BEsat}	base-emitter saturation voltage	$I_C = -500\text{ mA}; I_B = -50\text{ mA}$; note 1	–	–	–1.2	V
V_{BEon}	base-emitter turn-on voltage	$V_{CE} = -2\text{ V}; I_C = -100\text{ mA}$; note 1	–	–	–1.1	V
f_T	transition frequency	$I_C = -100\text{ mA}; V_{CE} = -5\text{ V};$ $f = 100\text{ MHz}$	100	300	–	MHz
C_c	collector capacitance	$V_{CB} = -10\text{ V}; I_E = I_C = 0; f = 1\text{ MHz}$	–	–	10	pF

Note

1. Pulse test: $t_p \leq 300\text{ }\mu\text{s}$; $\delta \leq 0.02$.


40 V, 0.5 A PNP low V_{CEsat} (BISS) transistor

PBSS3540M

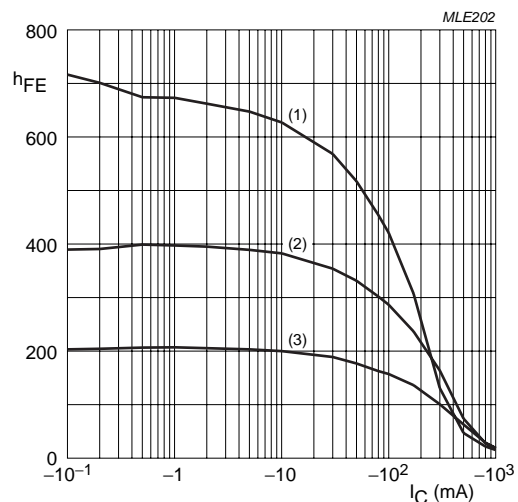 $V_{CE} = -2 \text{ V.}$


- (1) $T_{amb} = 150 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$

Fig.2 DC current gain as a function of collector current; typical values.

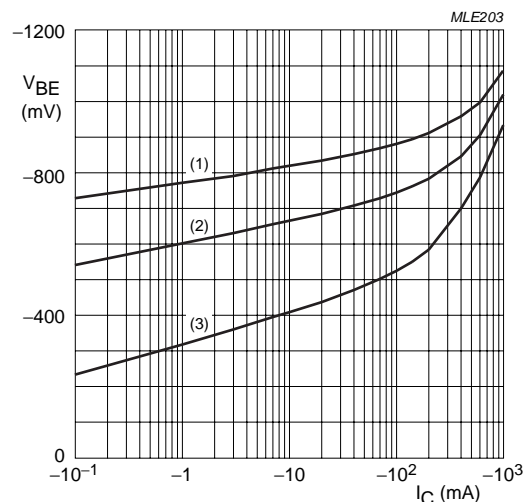 $V_{CE} = -2 \text{ V.}$


- (1) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = 150 \text{ }^{\circ}\text{C.}$

Fig.3 Base-emitter voltage as a function of collector current; typical values.

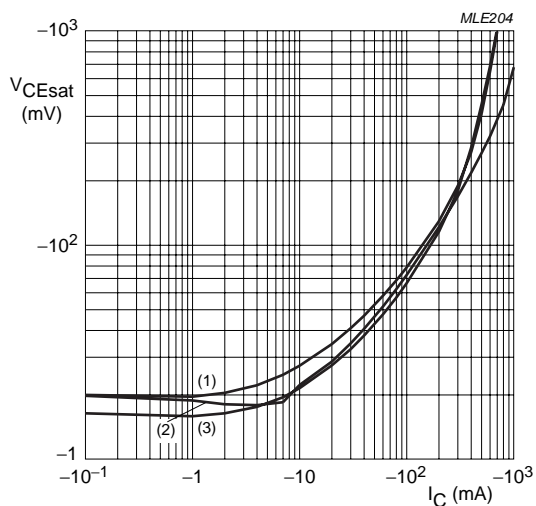 $I_C/I_B = 20.$

- (1) $T_{amb} = 150 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$

Fig.4 Collector-emitter saturation voltage as a function of collector current; typical values.

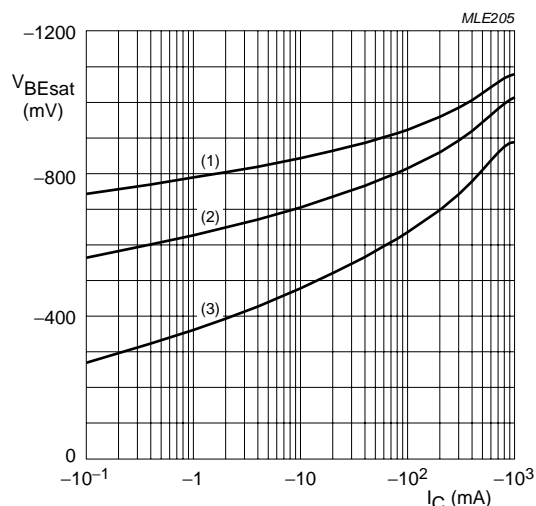
 $I_C/I_B = 20.$

- (1) $T_{amb} = 150 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$

Fig.5 Base-emitter saturation voltage as a function of collector current; typical values.

40 V, 0.5 A
PNP low V_{CEsat} (BISS) transistor


PBSS3540M

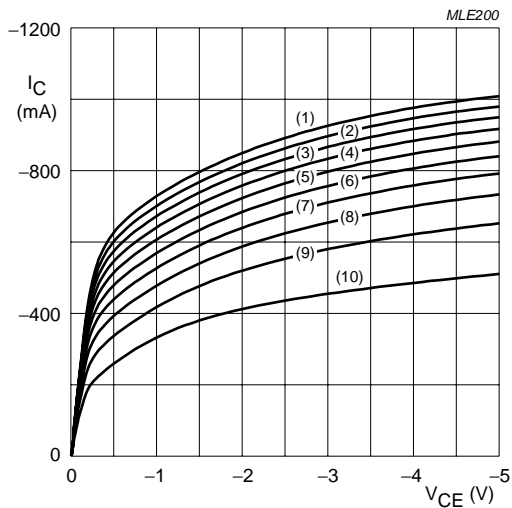

$T_{amb} = 25\text{ }^{\circ}\text{C}$.

(1) $I_B = -40\text{ mA}$.	(5) $I_B = -24\text{ mA}$.	(9) $I_B = -8\text{ mA}$.
(2) $I_B = -36\text{ mA}$.	(6) $I_B = -20\text{ mA}$.	(10) $I_B = -4\text{ mA}$.
(3) $I_B = -32\text{ mA}$.	(7) $I_B = -16\text{ mA}$.	
(4) $I_B = -28\text{ mA}$.	(8) $I_B = -12\text{ mA}$.	

Fig.6 Collector current as a function of collector-emitter voltage; typical values.

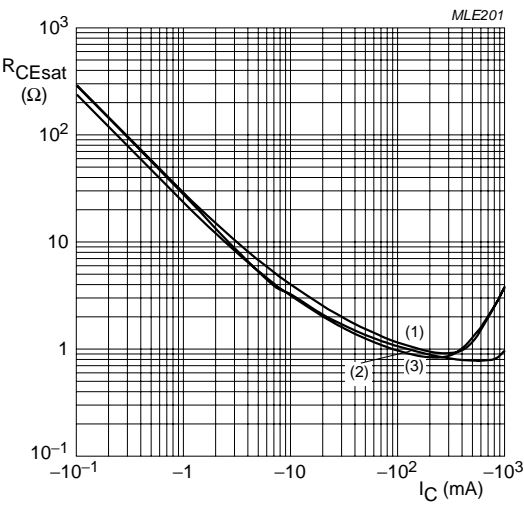

$I_C/I_B = 20$.

(1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
(2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
(3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.

Fig.7 Collector-emitter equivalent on-resistance as a function of collector current; typical values.



40 V, 0.5 A
PNP low V_{CEsat} (BISS) transistor

PBSS3540M

PACKAGE OUTLINE

Leadless ultra small plastic package; 3 solder lands; body 1.0 x 0.6 x 0.5 mm

SOT883

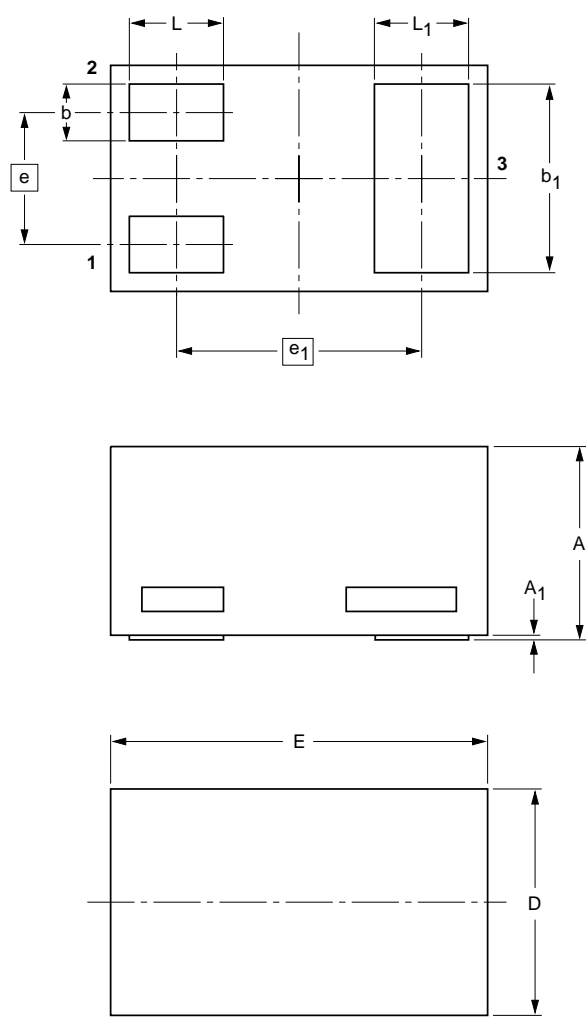


DIMENSIONS (mm are the original dimensions)

UNIT	A ⁽¹⁾	A ₁ max.	b	b ₁	D	E	e	e ₁	L	L ₁
mm	0.50 0.46	0.03	0.20 0.12	0.55 0.47	0.62 0.55	1.02 0.95	0.35	0.65	0.30 0.22	0.30 0.22

Note

1. Including plating thickness

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT883			SC-101			03-02-05 03-04-03

40 V, 0.5 A PNP low V_{CEsat} (BISS) transistor

PBSS3540M

DATA SHEET STATUS

DOCUMENT STATUS ⁽¹⁾	PRODUCT STATUS ⁽²⁾	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

Notes

1. Please consult the most recently issued document before initiating or completing a design.
2. The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

DISCLAIMERS

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions

above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

NXP Semiconductors

Customer notification

This data sheet was changed to reflect the new company name NXP Semiconductors. No changes were made to the content, except for the legal definitions and disclaimers.

Contact information

For additional information please visit: **<http://www.nxp.com>**

For sales offices addresses send e-mail to: **salesaddresses@nxp.com**

© NXP B.V. 2009

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

613514/01/pp9

Date of release: 2003 Aug 12

Document order number: 9397 750 11561

founded by

PHILIPS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nexperia:](#)

[PBSS3540M,315](#)