

**UMSB Plastic-Encapsulate Bridge Rectifier****RMSB30MA** Bridge Rectifier**Features**


- $I_{F(AV)}$  3A
- $V_{RRM}$  1000V
- High surge current capability
- Glass passivated chip

**Applications**

- General purpose 1 phase Bridge rectifier applications

**Marking**

- RMSB30MA

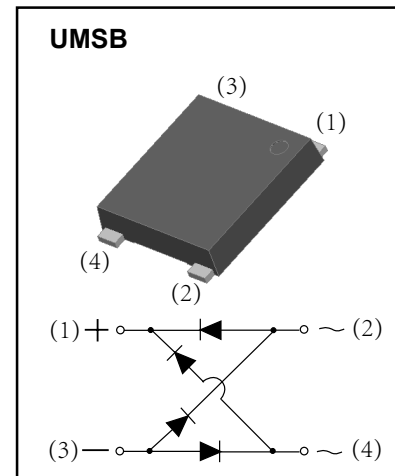**Limiting Values (Absolute Maximum Rating)**

| Item                                             | Symbol         | Unit                 | Conditions                                                                        | RMSB30MA  |
|--------------------------------------------------|----------------|----------------------|-----------------------------------------------------------------------------------|-----------|
| Repetitive Peak Reverse Voltage                  | $V_{RRM}$      | V                    |                                                                                   | 1000      |
| Maximum RMS Voltage                              | $V_{RMS}$      | V                    |                                                                                   | 700       |
| Maximum DC Blocking Voltage                      | $V_{DC}$       | V                    |                                                                                   | 1000      |
| Average Rectified Output Current                 | $I_O$          | A                    | 60Hz sine wave, R-load, $T_a=60^{\circ}\text{C}$                                  | 3.0       |
| Surge(Non-repetitive)Forward Current             | $I_{FSM}$      | A                    | 8.3ms half sine wave, 1 cycle, $T_j=25^{\circ}\text{C}$                           | 110       |
| Current Squared Time                             | $I^2t$         | $\text{A}^2\text{S}$ | $1\text{ms} \leq t < 8.3\text{ms}$ $T_j=25^{\circ}\text{C}$ , Rating of per diode | 50.2      |
| Operation Junction and Storage Temperature Range | $T_J, T_{stg}$ | $^{\circ}\text{C}$   |                                                                                   | -55 ~+150 |

**Electrical Characteristics ( $T=25^{\circ}\text{C}$  Unless otherwise specified)**

| Item                          | Symbol           | Unit                 | Test Condition                                                            |                           | Max |
|-------------------------------|------------------|----------------------|---------------------------------------------------------------------------|---------------------------|-----|
| Maximum Peak Forward Voltage  | $V_{FM}$         | V                    | $I_{FM}=3.0\text{A}$ , Pulse measurement, Rating of per diode             |                           | 1.3 |
| Maximum Reverse Recovery Time | $T_{RR}$         | ns                   | Measured with $I_F=0.5\text{A}$ , $I_R=1\text{A}$ , $I_{RR}=0.25\text{A}$ |                           | 250 |
| Maximum Peak Reverse Current  | $I_{RRM1}$       | $\mu\text{A}$        | $V_{RM}=V_{RRM}$ , Pulse measurement, Rating of per diode                 | $T_A=25^{\circ}\text{C}$  | 5.0 |
|                               | $I_{RRM2}$       | $\mu\text{A}$        |                                                                           | $T_A=125^{\circ}\text{C}$ | 500 |
| Thermal Resistance            | $R_{\theta J-A}$ | $^{\circ}\text{C/W}$ | Between junction and ambient                                              |                           | 55  |
|                               | $R_{\theta J-L}$ |                      | Between junction and lead                                                 |                           | 15  |
|                               | $R_{\theta J-C}$ |                      | Between junction and case                                                 |                           | 10  |

## Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

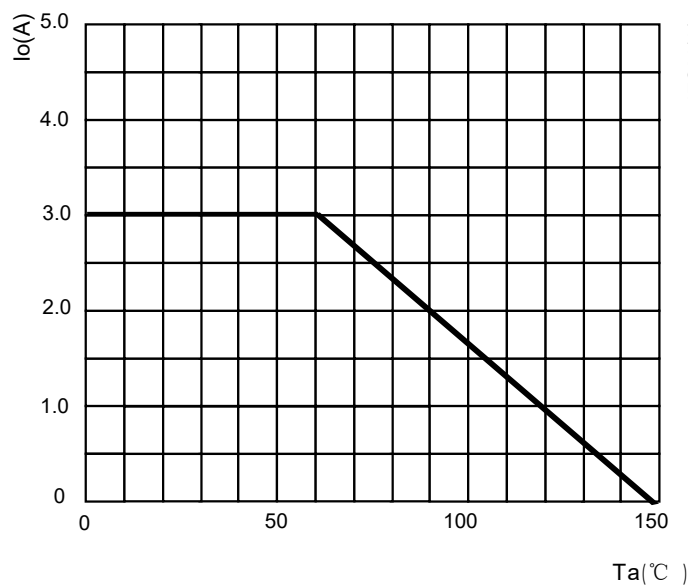


FIG.2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

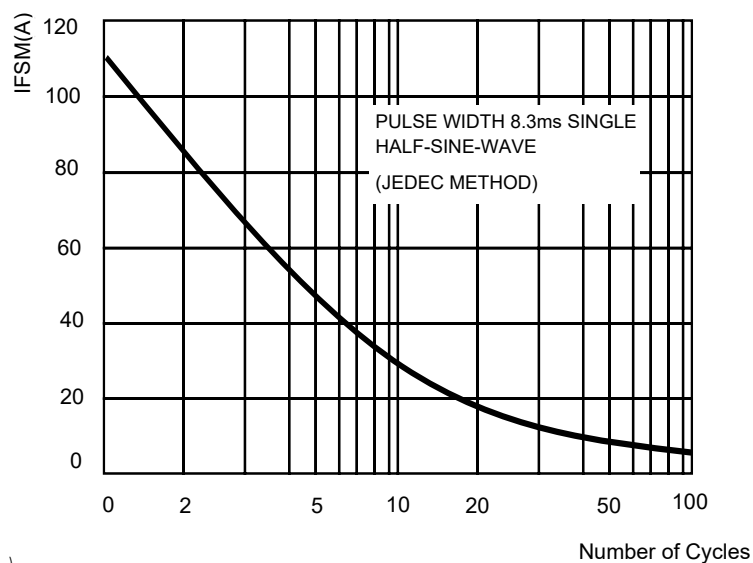


FIG.3: TYPICAL FORWARD CHARACTERISTICS



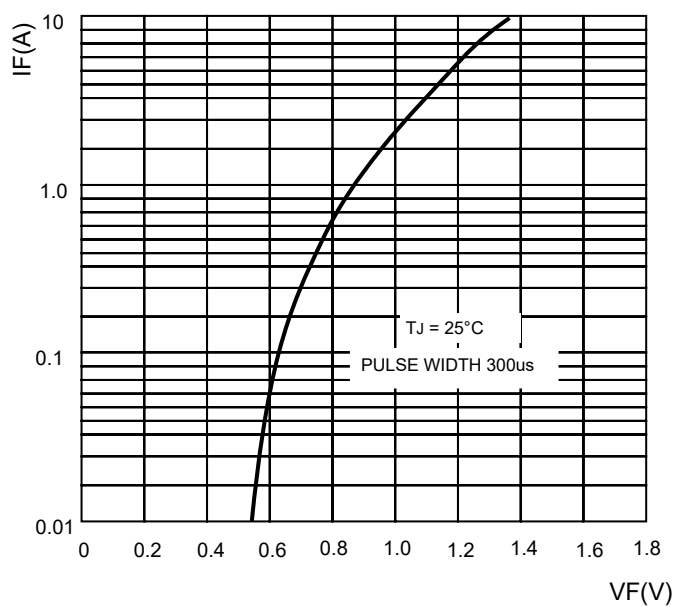


FIG.4: TYPICAL REVERSE CHARACTERISTICS

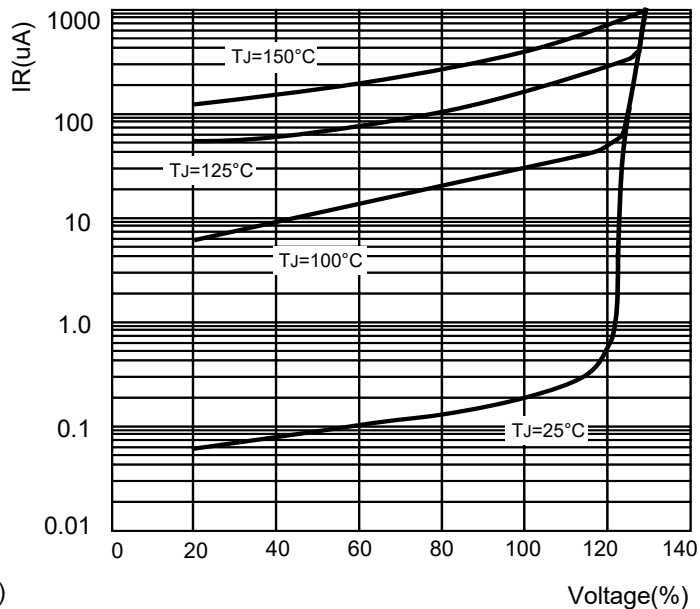


## UMSB Package Outline Dimensions

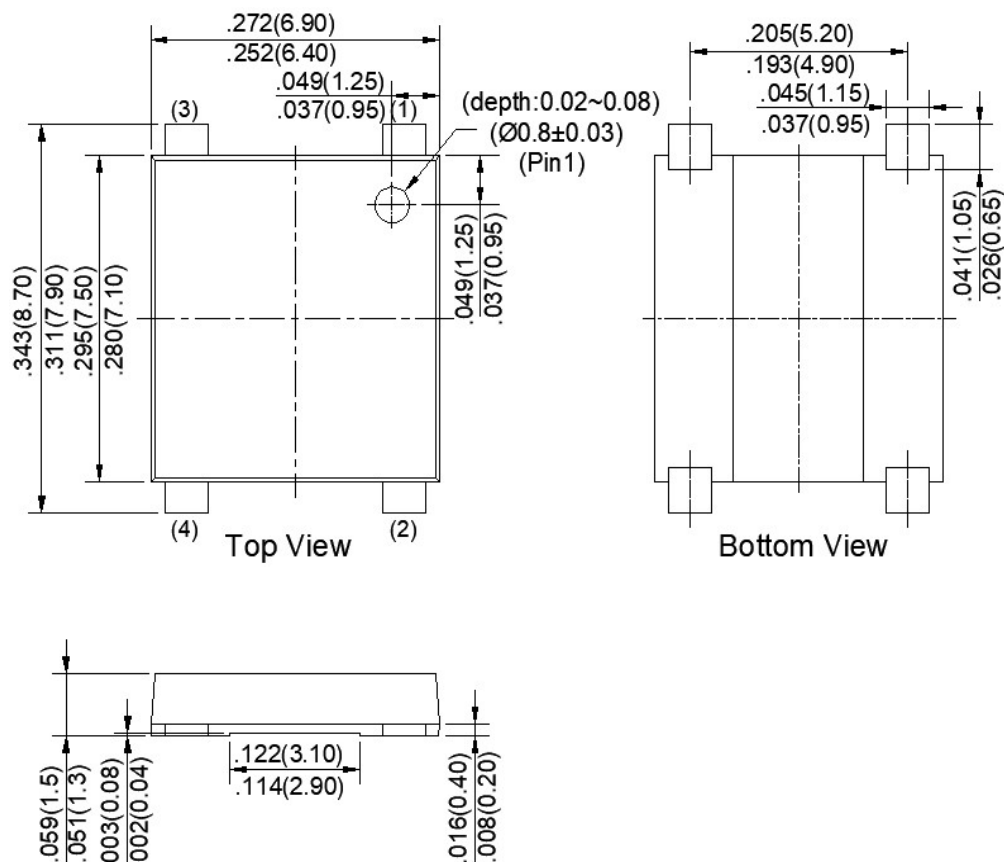

Dimensions in inches and (millimeters)

## UMSB Suggested Pad Layout

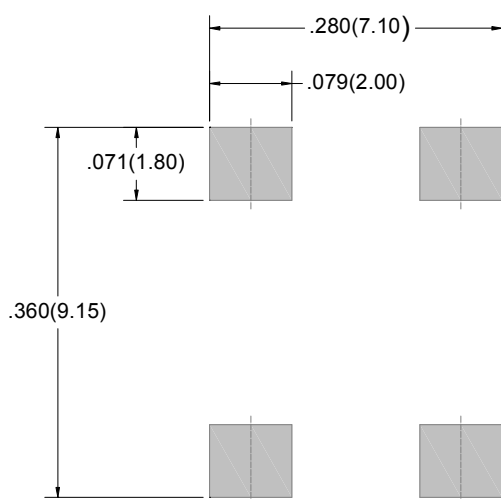

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

### NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.