

## **Wall Mounting Kit**


# **TSP-WMK03**

Order Code	TSP-WMK03
Compatible with	TSP 070, TSP 090, TSP 140, TSP 180, TSP 180WR, TSP-3P 240, TSP-BCM, TSP-BCMU, TSP-BFM, TSP-REM, TSPC 080, TSPC 120, TSPC 240, TSPC-DCM
Package content	1x Bracket
Material	Zinc clear
Weight	120 g
RoHS Exemptions	No Exemptions



## **Outline Dimensions**

### **Mechanical Drawing**

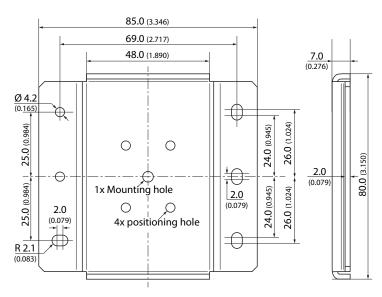

All dimensions in mm (inch) Tolerance: ±0.3 (±0.012)

#### Max. screw insertion depth

Series	Max. screw insertion depth	Series	Max. screw insertion depth	Series	Max. screw insertion depth
TSP 070	5 mm (0.197 inch)	TSP 180	4 mm (0.157 inch)	TSP-BFM	5 mm (0.197 inch)
TSP 070-EX		TSP 180-EX		TSP-REM	
TSP 090		TSP 180 WR		TSPC-080	3 mm (0.118 inch)
TSP 090-EX		TSP 240	5 mm (0.197 inch)	TSPC-120TSPC-240	
TSP 140	4 mm (0.157 inch)	TSP-BCM		TSPC-DCM-600	
TSP 140-EX		TSP-BCMU	3 mm (0.118 inch)		1

The screw insertion depth is referenced from the outside surface of the chassis.

Mounting screw type: M4 machine screw, DIN 7985. The use of washers can serve as an anti-vibration measure.

Note: To prevent damage to the device, do NOT exceed maximum screw insertion depth.

Note: Ensure the device is disconnected from supply before fitting wall mount.



© Copyright 2022 Traco Electronic AG