






|                       |                                          |
|-----------------------|------------------------------------------|
| Order Code            | TCK-098                                  |
| Inductance            | 22 $\mu$ H $\pm$ 20% (at 1 kHz / 250 mV) |
| Impedance (DCR)       | 110 m $\Omega$ max.                      |
| Rated Current         | 1.5 A max.                               |
| Operating Temperature | -40°C to +125°C                          |
| RoHS Exemptions       | No Exemptions                            |



### Impedance Curve

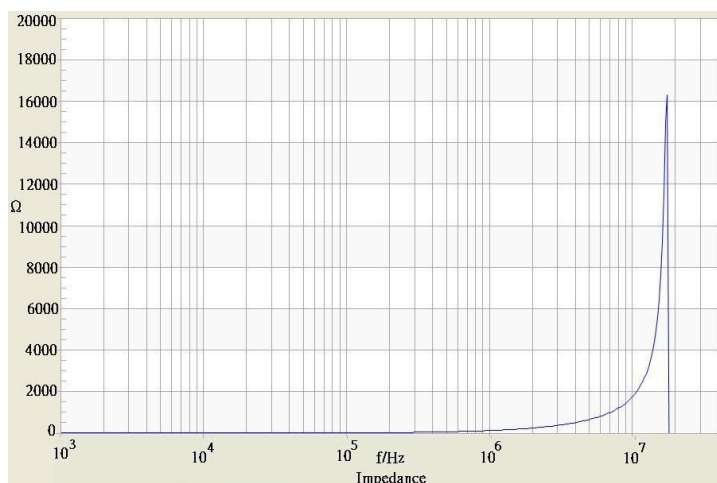

### Outline Dimensions



| Dimensions [mm] |               |
|-----------------|---------------|
| A               | 7.0 $\pm$ 0.5 |
| B               | 7.8 $\pm$ 0.5 |
| C               | 5.0 $\pm$ 0.7 |
| D               | 2.1 typ.      |
| E               | 7.5           |
| F               | 3             |
| G               | 2             |

All specifications valid at +25°C, unless otherwise stated.