

## Wall Mounting Kit


## TSP-WMK02

| Order Code      | TSP-WMK02  |
|-----------------|--|
| Compatible with | TSP 360, TSP 360WR, TSP-3P 480, TSP 600, TSP 600WR, TSP-3P 960, TSPC 480 |
| Package content | 2x Bracket   |
| Material        | Zinc clear   |
| Weight          | 40 g   |
| RoHS Exemptions | No Exemptions  |



### Outline Dimensions

#### Mechanical Drawing

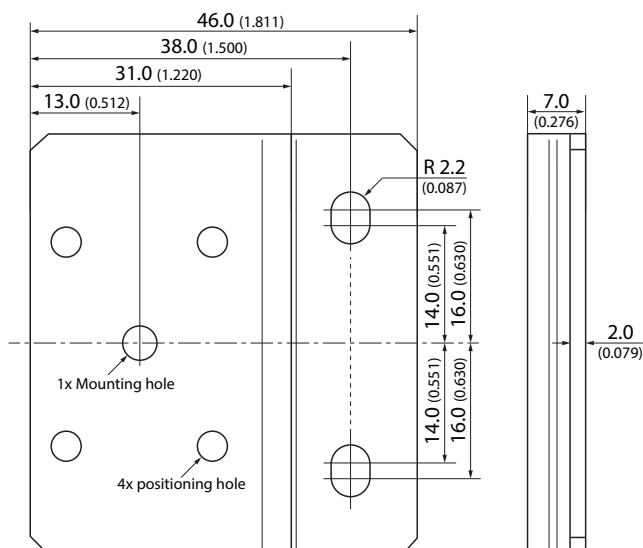

All dimensions in mm (inch)  
Tolerance:  $\pm 0.3$  ( $\pm 0.012$ )

#### Max. screw insertion depth

| Series     | Max. screw insertion depth | Series   | Max. screw insertion depth |
|------------|----------------------------|----------|----------------------------|
| TSP 360    | 3.5 mm (0.138 inch)        | TSP 960  | 5 mm (0.197 inch)          |
| TSP 360-EX |                            | TSPC 480 |                            |
| TSP 480    |                            |          |                            |
| TSP 600    | 5 mm (0.197 inch)          |          |                            |
| TSP 600-EX |                            |          |                            |
| TSP 600 WR |                            |          |                            |

The screw insertion depth is referenced from the outside surface of the chassis.

Mounting screw type: M4 machine screw, DIN 7985. The use of washers can serve as an anti-vibration measure.

**Note: To prevent damage to the device, do NOT exceed maximum screw insertion depth.**

**Note: Ensure the device is disconnected from supply before fitting wall mount.**