

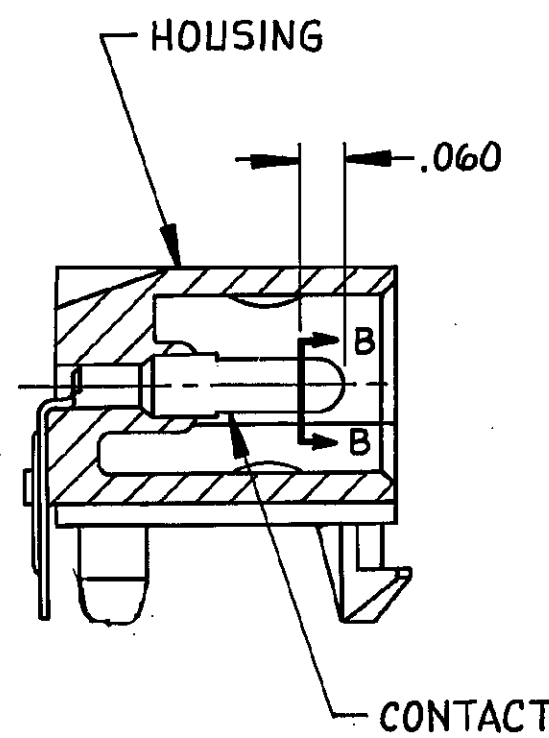
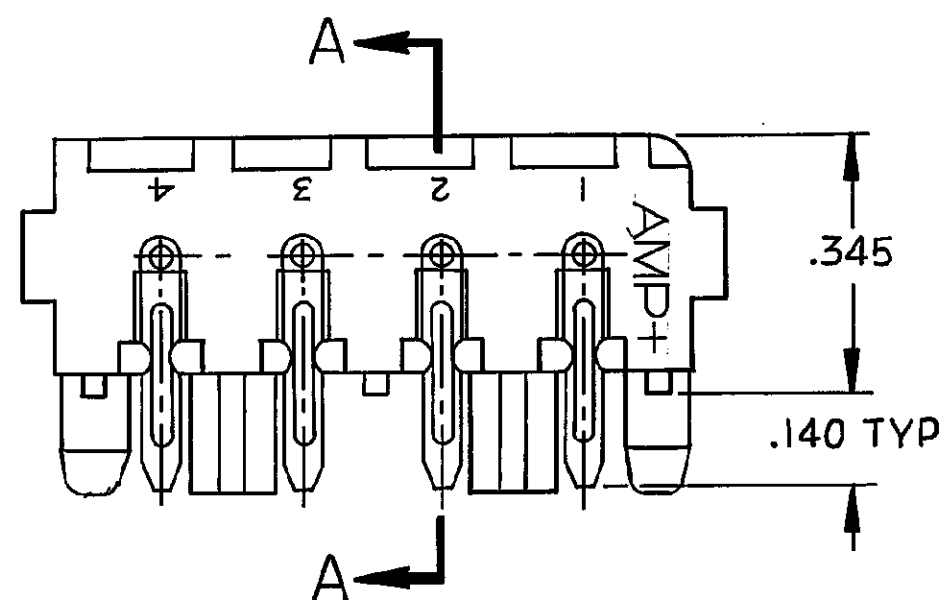
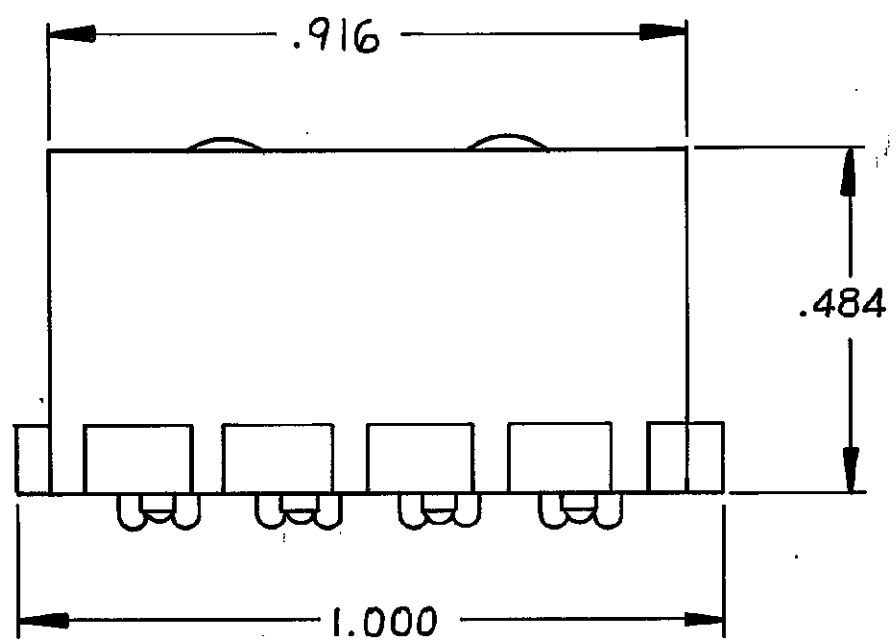



1. PARTS COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
2. RECOMMENDED EXPOSURE TO SOLDER WAVE (490°F) NOT TO EXCEED 5 SECONDS.
- ⚠ MATERIAL-HOUSING: NYLON UL94V-2 (NATURAL).
CONTACT: PHOS BRONZE (PRE-TIN).
- ⚠ MATERIAL-HOUSING: NYLON UL94V-0 (WHITE).
CONTACT: PHOS BRONZE (PRE-TIN).
5. DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

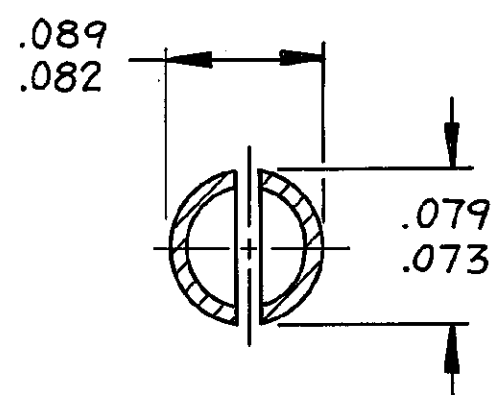


SECTION A-A

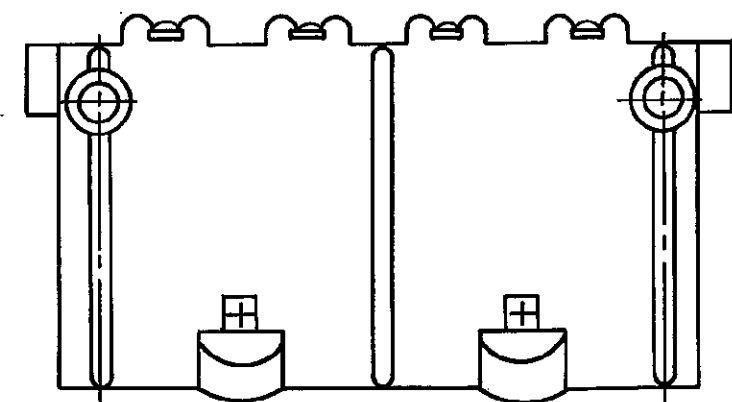

SECTION B-B
SCALE 10:1

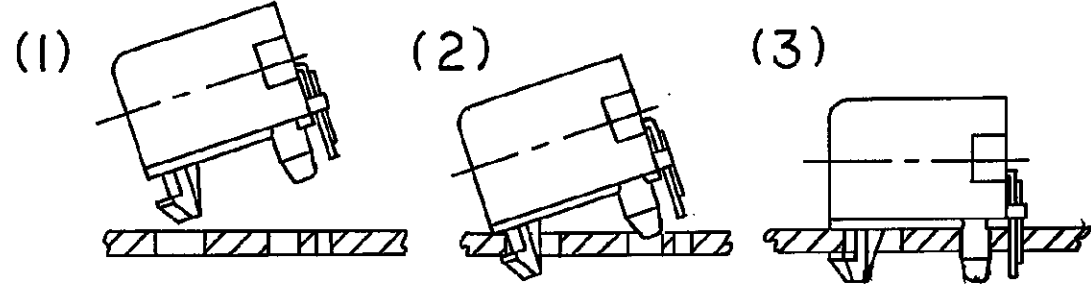

MOUNTING PROCEDURE

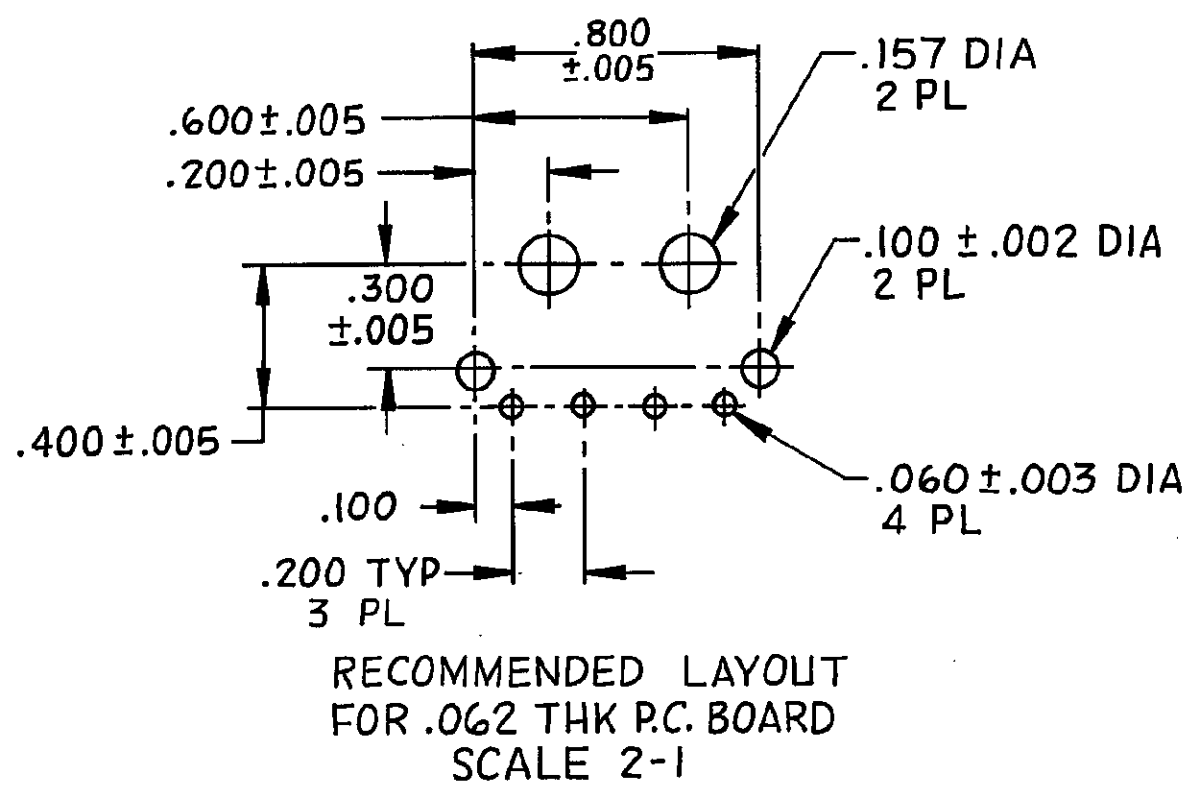

RECOMMENDED LAYOUT
FOR .062 THK P.C. BOARD
SCALE 2-1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± .015 ANGLES ±		CONTRACT NO	I-641737-1 641737-1		
MATERIAL		DR CHK APPD APPD	NAME P.C. HEADER, RIGHT ANGLE MOUNT, COMMERCIAL MATE-N-LOK, 4 CKT		
SEE TABLE		DSGN APPD	SIZE D	FSCM NO 00779	DRAWING NO 641737
SEE TABLE		OTHER APPD	SCALE 4-1 SHEET		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[641737-1](#)