

- Fully encapsulated power supplies in plastic casing for PCB mount
- Fully regulated outputs
- 3000 VAC I/O-isolation
- High efficiency up to 80%
- Universal input range 90 to 264 VAC
- Operating temperature range:  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$  max.
- Safety class II prepared
- Short circuit over power and over voltage limitation



TMG 07 Series AC/DC power modules come in fully encapsulated plastic package. They are ultra-compact, energy-efficient and cost/performance optimised for prevailing market requirements. The high efficiency and the use of high grade components make these modules suitable for an operating temperature range of  $-40^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$ . Together with very low no-load power consumption they are suitable for applications conforming with the ErP directive. The modules are protected against short-circuit and over voltage. EMI/EMC characteristics and the safety approval package qualify them for demanding applications in equipment for industrial or commercial environments.

| Models     |                   |                     |                     |                 |
|------------|-------------------|---------------------|---------------------|-----------------|
| Order Code | Output Power max. | Output Voltage nom. | Output Current max. | Efficiency typ. |
| TMG 07105  | 6.3 W             | 5 VDC               | 1'260 mA            | 77 %            |
| TMG 07112  | 7 W               | 12 VDC              | 583 mA              | 80 %            |
| TMG 07115  |                   | 15 VDC              | 466 mA              | 80 %            |
| TMG 07124  |                   | 24 VDC              | 292 mA              | 80 %            |

## Input Specifications

|                        |                             |                                                                                                                                                                                      |
|------------------------|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage          | - AC Range                  | Operational Range: <b>90 - 264 VAC</b> (Full Range)<br>Rated Range: <b>100 - 240 VAC</b> (Full Range)                                                                                |
|                        | - DC Range                  | Operational Range: <b>120 - 370 VDC</b> (Designed for, no certification)<br>Polarity: <b>+DC: N / -DC: L</b>                                                                         |
| Input Frequency        |                             | Operational Range: <b>47 - 440 Hz</b><br>Certified: <b>50/60 Hz</b>                                                                                                                  |
|                        |                             |                                                                                                                                                                                      |
| Input Current          | - Full Load & Vin = 230 VAC | <b>110 mA max.</b>                                                                                                                                                                   |
|                        | - Full Load & Vin = 115 VAC | <b>180 mA max.</b>                                                                                                                                                                   |
| Power Consumption      | - No load & Vin = 230 VAC   | <b>100 mW max.</b> (Ready to meet ErP directive)                                                                                                                                     |
|                        | - No load & Vin = 115 VAC   | <b>100 mW max.</b>                                                                                                                                                                   |
| Input Inrush Current   | - At 230 VAC                | <b>40 A max.</b>                                                                                                                                                                     |
|                        | - At 115 VAC                | <b>20 A max.</b><br>(For the 7 & 15 W models an external Thermistor has to be integrated in the circuit at the converter input L in series.<br>Thermistor recommendation: 10R / 15z) |
| Recommended Input Fuse |                             | <b>2'000 mA</b> (slow blow)<br>(The need of an external fuse has to be assessed in the final application.)                                                                           |

## Output Specifications

|                                        |                                 |                                            |
|----------------------------------------|---------------------------------|--------------------------------------------|
| Voltage Set Accuracy                   |                                 | <b>±2% max.</b>                            |
| Regulation                             | - Input Variation (Vmin - Vmax) | <b>0.5% max.</b>                           |
|                                        | - Load Variation (10 - 100%)    | <b>1% max.</b>                             |
| Ripple and Noise<br>(20 MHz Bandwidth) | 5 VDC model:                    | <b>120 mVp-p max.</b> (w/ 0.1 µF // 47 µF) |
|                                        | 12 VDC model:                   | <b>120 mVp-p max.</b> (w/ 0.1 µF // 47 µF) |
|                                        | 15 VDC model:                   | <b>150 mVp-p max.</b> (w/ 0.1 µF // 47 µF) |
|                                        | 24 VDC model:                   | <b>240 mVp-p max.</b> (w/ 0.1 µF // 47 µF) |
| Capacitive Load                        | 5 VDC model:                    | <b>3'300 µF max.</b>                       |
|                                        | 12 VDC model:                   | <b>1'000 µF max.</b>                       |
|                                        | 15 VDC model:                   | <b>470 µF max.</b>                         |
|                                        | 24 VDC model:                   | <b>68 µF max.</b>                          |
| Minimum Load                           |                                 | <b>Not required</b>                        |
| Temperature Coefficient                |                                 | <b>±0.02 %/K max.</b>                      |
| Hold-up Time                           | - At 230 VAC                    | <b>30 ms min.</b>                          |
|                                        | - At 115 VAC                    | <b>5 ms min.</b>                           |
| Start-up Time                          | - At 230 VAC                    | <b>100 ms max.</b>                         |
|                                        | - At 115 VAC                    | <b>120 ms max.</b>                         |
| Short Circuit Protection               |                                 | <b>Continuous, Automatic recovery</b>      |
| Output Current Limitation              |                                 | <b>134 - 203% of Iout max.</b>             |
| Transient Response                     | - Response Deviation            | <b>2% max.</b> (75% to 100% Load Step)     |
|                                        | - Response Time                 | <b>500 µs typ.</b> (75% to 100% Load Step) |

## Safety Specifications

|                       |                             |                                                                                          |
|-----------------------|-----------------------------|------------------------------------------------------------------------------------------|
| Safety Standards      | - IT / Multimedia Equipment | EN 60950-1<br>EN 62368-1<br>IEC 60950-1<br>IEC 62368-1<br>UL 60950-1<br>UL 62368-1       |
|                       | - Certification Documents   | <a href="http://www.tracopower.com/overview/tmg07">www.tracopower.com/overview/tmg07</a> |
| Protection Class      |                             | <b>Class I &amp; II (Prepared): Reinforced Insulation</b>                                |
| Pollution Degree      |                             | <b>PD 2</b>                                                                              |
| Over Voltage Category |                             | <b>OVC II</b>                                                                            |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

## EMC Specifications

|               |                                |                                                                                                              |
|---------------|--------------------------------|--------------------------------------------------------------------------------------------------------------|
| EMI Emissions | - Conducted Emissions          | EN 55032 class B (internal filter)                                                                           |
|               | - Radiated Emissions           | EN 55032 class B (internal filter)                                                                           |
| EMS Immunity  |                                | EN 55024 (IT Equipment)                                                                                      |
|               | - Electrostatic Discharge      | Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A<br>Contact: EN 61000-4-2, $\pm 4$ kV, perf. criteria A       |
|               | - RF Electromagnetic Field     | EN 61000-4-3, 10 V/m, perf. criteria A                                                                       |
|               | - EFT (Burst) / Surge          | EN 61000-4-4, $\pm 2$ kV, perf. criteria A                                                                   |
|               |                                | L to L: EN 61000-4-5, $\pm 1$ kV, perf. criteria A                                                           |
|               |                                | Ext. input component: Use an external Varistor at the converter input (in parallel). Recommendation: 14S471K |
|               | - Conducted RF Disturbances    | EN 61000-4-6, 10 Vrms, perf. criteria A                                                                      |
|               | - PF Magnetic Field            | Continuous: EN 61000-4-8, 30 A/m, perf. criteria A                                                           |
|               | - Voltage Dips & Interruptions | 230 VAC / 50 Hz: 30%, 25 periods, perf. criteria A<br>>95%, 0.5 periods, perf. criteria A                    |
|               |                                | 115 VAC / 60 Hz: 30%, 25 periods, perf. criteria A<br>>95%, 0.5 periods, perf. criteria A                    |

## General Specifications

|                              |                         |                                                                                                                                                                                                                                                                                                        |
|------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Relative Humidity            |                         | 95% max. (non condensing)                                                                                                                                                                                                                                                                              |
| Temperature Ranges           | - Operating Temperature | -40°C to +70°C                                                                                                                                                                                                                                                                                         |
|                              | - Storage Temperature   | -40°C to +85°C                                                                                                                                                                                                                                                                                         |
| Power Derating               | - High Temperature      | 2.5 %/K above 50°C (12-24 VDC models)<br>2.4 %/K above 45°C (5 VDC models)                                                                                                                                                                                                                             |
|                              | - Low Input Voltage     | 2 %/V below 100 VAC                                                                                                                                                                                                                                                                                    |
| Cooling System               |                         | Natural convection (20 LFM)                                                                                                                                                                                                                                                                            |
| Altitude During Operation    |                         | 3'000 m max.                                                                                                                                                                                                                                                                                           |
| Switching Frequency          |                         | 60 - 140 kHz (PWM)                                                                                                                                                                                                                                                                                     |
| Insulation System            |                         | Reinforced Insulation                                                                                                                                                                                                                                                                                  |
| Working Voltage (rated)      |                         | 340 VAC                                                                                                                                                                                                                                                                                                |
| Isolation Test Voltage       | - Input to Output, 60 s | 3'000 VAC                                                                                                                                                                                                                                                                                              |
| Creepage                     | - Input to Output       | 5 mm min.                                                                                                                                                                                                                                                                                              |
| Clearance                    | - Input to Output       | 4.6 mm min.                                                                                                                                                                                                                                                                                            |
| Leakage Current (at 240 VAC) | - Earth Leakage Current | 250 $\mu$ A max.                                                                                                                                                                                                                                                                                       |
| Reliability                  | - Calculated MTBF       | 500'000 h (MIL-HDBK-217F, ground benign)                                                                                                                                                                                                                                                               |
| Washing Process              |                         | Not allowed                                                                                                                                                                                                                                                                                            |
| Housing Material             |                         | Plastic resin (UL 94 V-0 rated)                                                                                                                                                                                                                                                                        |
| Potting Material             |                         | Silicone (UL 94 V-0 rated) (Hermetical sealed structure, dust-proof only non water-proof )                                                                                                                                                                                                             |
| Pin Material                 |                         | Brass                                                                                                                                                                                                                                                                                                  |
| Pin Surface Plating          |                         | Tin (120 $\mu$ m min.), matte                                                                                                                                                                                                                                                                          |
| Housing Type                 |                         | Plastic Case                                                                                                                                                                                                                                                                                           |
| Mounting Type                |                         | PCB Mount                                                                                                                                                                                                                                                                                              |
| Connection Type              |                         | THD (Through-Hole Device)                                                                                                                                                                                                                                                                              |
| Weight                       |                         | 26 g                                                                                                                                                                                                                                                                                                   |
| Environmental Compliance     | - REACH Declaration     | <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a><br>REACH SVHC list compliant<br>REACH Annex XVII compliant                                                                                                                            |
|                              | - RoHS Declaration      | <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a><br>Exemptions: 7c-I<br>(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.) |



All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

## Supporting Documents

[Overview Link](#) (for additional Documents)

[www.tracopower.com/overview/tmg07](http://www.tracopower.com/overview/tmg07)

## Outline Dimensions

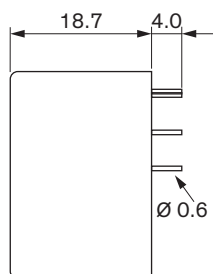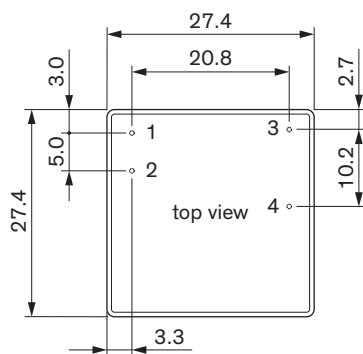

Dimensions in mm  
Tolerances  $\pm 0.5$  mm  
Pin tolerances  $\pm 0.1$  mm

### Pinout

| Pin | Function  |
|-----|-----------|
| 1   | AC IN (N) |
| 2   | AC IN (L) |
| 3   | +Vout     |
| 4   | -Vout     |