

- Compact SIP-8 package
- I/O-isolation voltage 1'600 VDC
- Fully regulated outputs
- Operating temperature range -40°C to $+90^{\circ}\text{C}$
- Continuous short circuit protection
- Remote On/Off
- 3-year product warranty
- Designed to meet UL 62368-1



TEC 3 is a new series with the design purpose to improve the prevalent 3 Watt SIP-8 DC/DC converters in terms of cost, efficiency and performance. The latest technology and components effectuate a high efficiency for a low thermal loss. This enables an operating temperature range from -40°C up to $+90^{\circ}\text{C}$. The converters are fully regulated over 0 - 100% load. The low input range input is extended from 4.5 to 13.2 VDC while models are also available with the standard 2:1 input ranges of 9-18, 18-36 and 36-75 VDC (see TEC 3WI series for 4:1 input ranges). The functional I/O-isolation system is designed to meet IEC/EN 62368-1 with a test voltage (60 s) of 1600 VDC.

Models						
Order Code	Input Voltage Range	Output 1		Output 2		Efficiency typ.
		Vnom	I _{max}	Vnom	I _{max}	
TEC 3-0910	4.5 - 13.2 VDC (9 VDC nom.)	3.3 VDC	700 mA			75 %
TEC 3-0911		5 VDC	600 mA			78 %
TEC 3-0919		9 VDC	333 mA			81 %
TEC 3-0912		12 VDC	250 mA			83 %
TEC 3-0913		15 VDC	200 mA			84 %
TEC 3-0915		24 VDC	125 mA			82 %
TEC 3-0921		+5 VDC	300 mA	-5 VDC	300 mA	79 %
TEC 3-0922		+12 VDC	125 mA	-12 VDC	125 mA	82 %
TEC 3-0923		+15 VDC	100 mA	-15 VDC	100 mA	82 %
TEC 3-1210	9 - 18 VDC (12 VDC nom.)	3.3 VDC	700 mA			77 %
TEC 3-1211		5 VDC	600 mA			81 %
TEC 3-1219		9 VDC	333 mA			82 %
TEC 3-1212		12 VDC	250 mA			84 %
TEC 3-1213		15 VDC	200 mA			85 %
TEC 3-1215		24 VDC	125 mA			85 %
TEC 3-1221		+5 VDC	300 mA	-5 VDC	300 mA	81 %
TEC 3-1222		+12 VDC	125 mA	-12 VDC	125 mA	85 %
TEC 3-1223		+15 VDC	100 mA	-15 VDC	100 mA	83 %
TEC 3-2410	18 - 36 VDC (24 VDC nom.)	3.3 VDC	700 mA			77 %
TEC 3-2411		5 VDC	600 mA			82 %
TEC 3-2419		9 VDC	333 mA			83 %
TEC 3-2412		12 VDC	250 mA			85 %
TEC 3-2413		15 VDC	200 mA			86 %
TEC 3-2415		24 VDC	125 mA			84 %
TEC 3-2421		+5 VDC	300 mA	-5 VDC	300 mA	82 %
TEC 3-2422		+12 VDC	125 mA	-12 VDC	125 mA	84 %
TEC 3-2423		+15 VDC	100 mA	-15 VDC	100 mA	85 %
TEC 3-4810	36 - 75 VDC (48 VDC nom.)	3.3 VDC	700 mA			75 %
TEC 3-4811		5 VDC	600 mA			80 %
TEC 3-4819		9 VDC	333 mA			82 %
TEC 3-4812		12 VDC	250 mA			84 %
TEC 3-4813		15 VDC	200 mA			85 %
TEC 3-4815		24 VDC	125 mA			86 %
TEC 3-4821		+5 VDC	300 mA	-5 VDC	300 mA	80 %
TEC 3-4822		+12 VDC	125 mA	-12 VDC	125 mA	86 %
TEC 3-4823		+15 VDC	100 mA	-15 VDC	100 mA	83 %

Input Specifications

Input Current	- At no load	9 Vin models: 55 mA typ. 12 Vin models: 30 mA typ. 48 Vin models: 8 mA typ. 24 Vin models: 12 mA typ. (3.3 Vout model) 12 mA typ. (5 Vout model) 12 mA typ. (9 Vout model) 12 mA typ. (12 Vout model) 12 mA typ. (15 Vout model) 12 mA typ. (24 Vout model) 12 mA typ. (5 / -5 Vout model) 12 mA typ. (12 / -12 Vout model) 15 mA typ. (15 / -15 Vout model)
Surge Voltage		9 Vin models: 15 VDC max. (1 s max.) 12 Vin models: 25 VDC max. (1 s max.) 24 Vin models: 50 VDC max. (1 s max.) 48 Vin models: 100 VDC max. (1 s max.)
Under Voltage Lockout		9 Vin models: 2 VDC min. / 3 VDC typ. / 4 VDC max. 12 Vin models: 6 VDC min. / 7 VDC typ. / 8 VDC max. 24 Vin models: 13 VDC min. / 15 VDC typ. / 17 VDC max. 48 Vin models: 29 VDC min. / 32 VDC typ. / 35 VDC max.
Recommended Input Fuse		9 Vin models: 1'600 mA (slow blow) 12 Vin models: 800 mA (slow blow) 24 Vin models: 500 mA (slow blow) 48 Vin models: 315 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)
Input Filter		Internal Capacitor

Output Specifications

Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax) - Load Variation (0 - 100%) - Cross Regulation (25% / 100% asym. load)	single output models: 0.2% max. dual output models: 0.2% max. single output models: 1% max. dual output models: 1% max. (Output 1) 1% max. (Output 2) dual output models: 5% max.
Ripple and Noise	- 20 MHz Bandwidth	75 mVp-p typ.
Capacitive Load	- single output - dual output	3.3 Vout models: 4'400 µF max. 5 Vout models: 2'200 µF max. 9 Vout models: 1'300 µF max. 12 Vout models: 1'000 µF max. 15 Vout models: 820 µF max. 24 Vout models: 470 µF max. 5 / -5 Vout models: 1'200 / 1'200 µF max. 12 / -12 Vout models: 520 / 520 µF max. 15 / -15 Vout models: 440 / 440 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Start-up Time		10 ms typ. / 20 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		140 - 240% of Iout max. 180% typ. of Iout max.
Transient Response	- Response Time	500 µs typ. (25% Load Step)

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	Designed for EN 62368-1 (no certification)
------------------	-----------------------------	--

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class A (with external filter)
	- Radiated Emissions	EN 55032 class B (with external filter)
External filter proposal:		www.tracopower.com/overview/tec3
EMS Immunity	- Electrostatic Discharge	Air: EN 61000-4-2, ± 8 kV, perf. criteria A
	- RF Electromagnetic Field	Contact: EN 61000-4-3, ± 6 kV, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-3, 10 V/m, perf. criteria A
		EN 61000-4-4, ± 2 kV, perf. criteria A
		EN 61000-4-5, ± 1 kV, perf. criteria A
	- Conducted RF Disturbances	Ext. input component: KY 220 μ F / 100 V
	- PF Magnetic Field	Continuous: EN 61000-4-6, 10 Vrms, perf. criteria A
		1 s: EN 61000-4-8, 100 A/m, perf. criteria A
		EN 61000-4-8, 1000 A/m, perf. criteria A

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-40°C to +90°C
	- Case Temperature	+105°C max.
	- Storage Temperature	-55°C to +125°C
Power Derating	- High Temperature	3.4 %/K above 75°C
Cooling System		Natural convection (20 LFM)
Remote Control	- Current Controlled Remote	On: open circuit
		Off: 2 to 4 mA current (internal 1 k Ω resistor)
	- Off Idle Input Current	External circuit proposal: www.tracopower.com/info/current-remote.pdf
Switching Frequency		2.5 mA typ.
Insulation System		100 kHz min. (PFM)
Isolation Test Voltage	- Input to Output, 60 s	Functional Insulation
Isolation Resistance	- Input to Output, 500 VDC	1'600 VDC
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'000 M Ω min.
Reliability	- Calculated MTBF	50 pF max.
Washing Process		5'124'000 h (MIL-HDBK-217F, ground benign)
	See Cleaning Guideline:	Allowed (hermetical product)
Environment	- Vibration	www.tracopower.com/info/cleaning.pdf
	- Mechanical Shock	MIL-STD-810F
	- Thermal Shock	MIL-STD-810F
Housing Material		MIL-STD-810F
Potting Material		Non-conductive Plastic (UL 94 V-0 rated)
Pin Material		Silicone (UL 94 V-0 rated)
Pin Foundation Plating		Copper
Pin Surface Plating		Nickel (1 - 2 μ m)
Housing Type		Tin (3 - 5 μ m), matte
Mounting Type		Plastic Case
Connection Type		PCB Mount
Footprint Type		THD (Through-Hole Device)
Soldering Profile		SIP8
Weight		Wave Soldering
		260°C / 10 s max.
		4.5 g

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Environmental Compliance - REACH Declaration

www.tracopower.com/info/reach-declaration.pdf

REACH SVHC list compliant

REACH Annex XVII compliant

www.tracopower.com/info/rohs-declaration.pdf

- RoHS Declaration

Exemptions: 7a, 7c-I

(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).



The SCIP number is provided on request.)

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tec3

Outline Dimensions

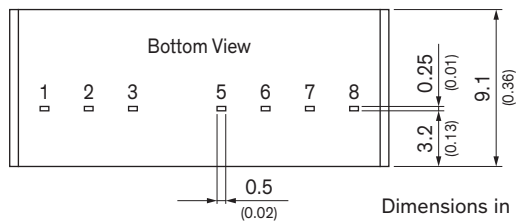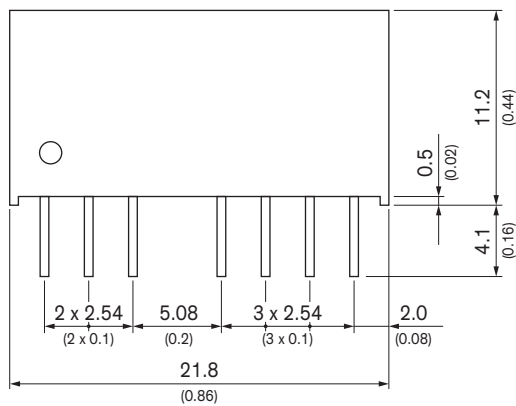

Dimensions in mm (inch)
Tolerances: ± 0.5 (± 0.02)
Pin pitch tolerances ± 0.25 (± 0.01)
Pin dimension tolerance ± 0.1 (0.004)

Pinout

Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5	NC	NC
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

NC: Not connected