

## DSUB SV FE SSDP STR 09P PL2 GC 4-40

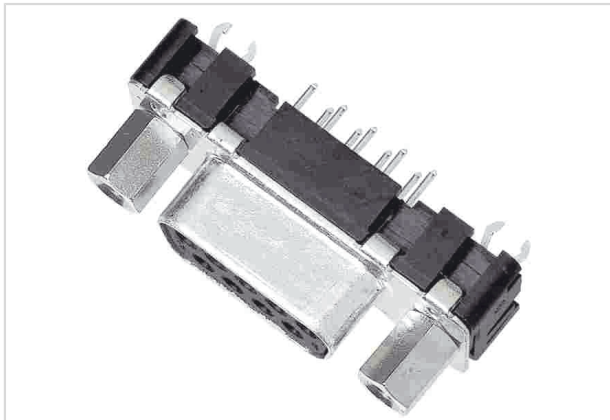


Image is for illustration purposes only. Please refer to product description.

Part number	09 66 151 6512
Specification	DSUB SV FE SSDP STR 09P PL2 GC 4-40
HARTING eCatalogue	<a href="https://b2b.harting.com/09661516512">https://b2b.harting.com/09661516512</a>

### Identification

Category	Connectors
Series	D-Sub
Identification	Standard
Element	Connector
Description of the contact	Stamped Straight

### Version

Termination method	Wave soldering termination
Gender	Female
Size	D-Sub 1
Connection type	Motherboard to daughtercard Mezzanine
Number of contacts	9
Termination length	2.9 mm
PCB fixing	With board locks
Locking type	Fixing flange with thread 4-40 UNC

### Technical characteristics

Distance between rows	2.84 mm
Contact spacing (termination side)	2.74 mm
Rated current	6.5 A
Clearance distance	≥1 mm
Creepage distance	≥1 mm



**Pushing Performance**  
Since 1945

## Technical characteristics

Insulation resistance	$>10^{10} \Omega$
Contact resistance	$\leq 10 \text{ m}\Omega$
Tightening torque	$\leq 0.6 \text{ Nm}$ Female screw lock
Limiting temperature	$-55 \dots +125 \text{ }^{\circ}\text{C}$
Insertion force	$\leq 30 \text{ N}$
Withdrawal force	$\geq 3.3 \text{ N}$ $\leq 20 \text{ N}$
Performance level	2 acc. to CECC 75301-802
Mating cycles	$\geq 250$
Test voltage $U_{r.m.s.}$	1 kV
Isolation group	IIIa ( $175 \leq \text{CTI} < 400$ )
PCB thickness	$\geq 1.6 \text{ mm}$
Installation height	6.2 mm
Hot plugging	No

## Material properties

Material (insert)	Thermoplastic resin, glass-fibre filled (PBTP) Shell: Plated steel
Colour (insert)	Black
Material (contacts)	Copper alloy
Surface (contacts)	Noble metal over Ni
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Antimony trioxide Lead Nickel
Requirement set with Hazard Levels	R26



**Pushing Performance**  
Since 1945

## Specifications and approvals

Specifications	DIN 41652
UL / CSA	UL 1977 ECBT2.E102079

## Commercial data

Packaging size	100
Net weight	5.64 g
Country of origin	Romania
European customs tariff number	85366990
GTIN	5713140080553
eCl@ss	27440214 D-Sub coupler

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

09661516512